



Wireless Guitar System

Thomas
Bj



Important Safety Instructions - please these instructions in a safe place

Before using your Xvive U2 Digital Wireless System, carefully read the operating instructions.


1. Observe all instructions carefully in the U2 manual.
2. Do not perform service operations beyond those described in the U2 Manual. Services required when the apparatus has been damaged in any way, such as:
 - Liquid has been spilled or objects have fallen into the apparatus
 - The unit has been exposed to rain or moisture
 - The unit does not operate normally or changes in performance in a significant way
 - The unit is dropped or the enclosure is damaged
3. Do not place near heat sources, such as radiators, heat registers, or appliances which produce heat.
4. Guard against objects or liquids entering the device. Do not use or place unit near water.
5. Clean only with a damp cloth.
6. Only use attachments/accessories specified by the manufacturer.
7. Prolonged listening at high volume levels may cause irreparable hearing loss and/or damage. Always be sure to practice "safe listening."

System Specification

Range	>70 feet Line-of-site outdoors.*
Latency	<6ms
Frequency Response	20-20KHZ, +1dB/-3dB
THD + Noise	<0.05%(1KHZ@-10dbFS)
Dynamic Range	>103dB A weighted
Operating Band	2.4GHZ ISM Worldwide
Operating Temperature	-10°C to 50°C
Sample Rate	24bit/48kHz uncompressed digital transmission



*Note: Actual range is dependent on RF environment, including reflections, interference and absorption

Quick Start Diagram

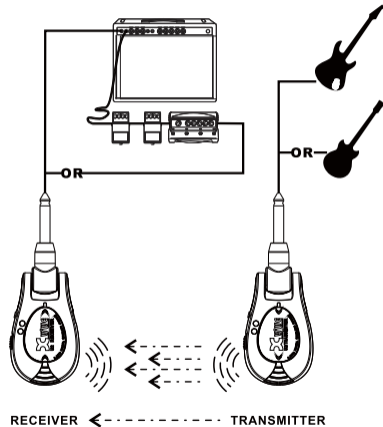

Wireless Guitar System

www.xviveaudio.com



Basic Operation

1.Power – Slide Switch to turn on/off TRANSMITTER/RECEIVER

2.Power LED and Battery LED

▲ Solid Red LED indicates the power on,

▲ The flashing red LED indicates the battery is low


charge, it needs to be recharged .

▲ In the progress of charging, the light will stop flashing and will turn off when it is fully charge.

3.Channel Select - Align TRANSMITTER and RECEIVER channels.

▲ Double click the switch to activate the channel select function,

▲ Follow the diagram below to set up the channel , meanwhile the audio signal indicator LED will flash to indicate the channel.



* For the flashing channel indication, please refer to chart 1*

4.Transmitter Audio signal indicator LED

▲ When Power is on, the Blue LED will flash to indicate the pre-set channel,

▲ After activating the channel selection function, click the button to set up the channel , the blue LED will flash to indicate the channel

* For the flicking channel indication, please refer to chart 1*

5.Receiver Audio Signal indicator LED

▲ When the power is on, the blue LED will flash to indicate the pre-set channel .

▲ After activating the channel selection function, click the channel button, the blue LED will flash to indicate the channel

▲ The Receiver audio signal indicator LED will become solid blue when the Transmitter and Receiver are in alignment.

▲ When the signal is good, The receiver audio Signal indicator LED will become solid blue, it will start to flash if the signal is no good .

For the flashing channel indication, please refer to chart 1

6. USB Port – Battery recharger port.

Chart 1, Flashing channel indication

Channel 1	The Audio signal LED will flash once
Channel 2	The Audio signal LED will flash twice
Channel 3	The Audio signal LED will flash three times
Channel 4	The Audio signal LED will flash four times